



'elmex' range of Terminal Blocks for conductor size ranging from 2.5 to 95 mm² are tested and approved for 1000V DC / 1500V DC and are suitable for use in Solar Photovoltaic Systems. Electrical ratings of these terminal blocks are given below. These terminal blocks have conductor termination by screw-clamp technology or by screwless (spring clamp technology).

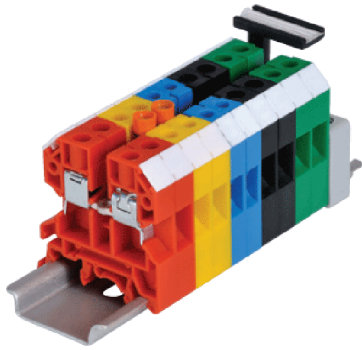

● SCREW CLAMP TERMINAL BLOCKS ●

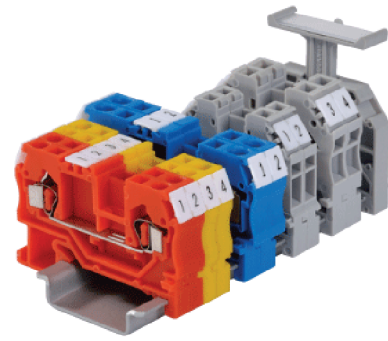

● SCREWLESS TERMINAL BLOCKS ●

'elmex' Type	Ratings
KUT 2.5N	1000V DC/24 A/2.5 mm ² /0.5 Nm
KUT 4N	1000V DC/32 A/4 mm ² /0.6 Nm
KUT 6N	1000V DC/41 A/6 mm ² /0.8 Nm
KUT 10N	1000V DC/63 A/10 mm ² /1.2 Nm
KUT 25	1000V DC/101 A/25 mm ² /2.3 Nm
KUT35	1000V DC/125 A/35 mm ² /3 Nm
KUT 50	1000V DC/150 A/50 mm ² /8 Nm
KUT 95	1000V DC/232 A/95 mm ² /20 Nm
DST 2.5	1000V DC/24 A/2.5 mm ²
DST 2.5 1x2	1000V DC/24 A/2.5 mm ²
DST 4	1000V DC/32 A/4 mm ²
DST 6	1000V DC/41 A/6 mm ²
DST 10	1000V DC/57 A/10 mm ²
DST 16	1000V DC/76 A/16 mm ²
SCT 2.5	1000V DC/24 A/2.5 mm ²
SCT 4	1000V DC/32 A/4 mm ²
MCT 2.5	1000V DC/24 A/2.5 mm ²
MCT 2.5P4	1000V DC/24 A/2.5 mm ²
MCT 4	1000V DC/32 A/4 mm ²
DCT 2.5 1x2	1000V DC/24 A/2.5 mm ²
DCT 2.5 2x2	1000V DC/24 A/2.5 mm ²